

Reconstruction of the local contractility of the cardiac muscle from deficient apparent kinematics

G. Pozzi^a, D. Ambrosi^a, S. Pezzuto^{b,c,*}

^a*Dipartimento di Scienze Matematiche “G.L. Lagrange”, Politecnico di Torino, Italy*

^b*Laboratory of Mathematics for Biology and Medicine, Department of Mathematics, Università di Trento, Italy*

^c*Euler Institute, Università della Svizzera italiana, Switzerland*

Abstract

Active solids are a large class of materials, including both living soft tissues and artificial matter, that share the ability to undergo strain even in absence of external loads. While in engineered materials the actuation is typically designed *a priori*, in natural materials it is an unknown of the problem. In such a framework, the identification of inactive regions in active materials is of particular interest. An example of paramount relevance is cardiac mechanics and the assessment of regions of the cardiac muscle with impaired contractility. The impossibility to measure the local active forces directly, suggests us to develop a novel methodology exploiting kinematic data from clinical images by a variational approach to reconstruct the local contractility in the cardiac muscle. Introducing a suitable cost functional and effective regularization methods, we minimize the discrepancy between observed and simulated displacement and we recover the contractility map of the muscle. Numerical experiments, including severe conditions with added noise to model uncertainties, and data knowledge limited to the boundary, demonstrate the effectiveness of our approach. Unlike other methods, we provide a spatially continuous recovery of the contractility map at a low computational cost.

Keywords: Active stress, inverse problem, parameter estimation, contractility, nonlinear mechanics

1. Introduction

Soft active solids are materials able to strain and exhibit tensional fields even in absence of external loads. This class of materials encompasses a wide variety of samples, ranging from living soft tissues, such as muscles [30], to the artificial materials widely employed in soft robotics, i.e., active gels [12]. While in artificial active materials the actuation is designed to target the desired features of the sample, in natural materials the activation is not known *a priori*. For natural active solids it is therefore important to formulate mathematical methods to determine the intensity map of the activity, or even regions of compromised activation. A paradigmatic example of such complexity is the cardiac muscle, where the stress generated by the activation of the cardiomyocytes (cardiac cells) depends both on the location of the cells in the cardiac wall and on orientation of the fibres [37].

From the point of view of mathematical modelling, the active behavior of active solids can be accounted for by an *active stress* term, which is added to the first variation of the strain energy density characterizing the material (the standard contribution of stress of inert matter). Alternatively, a less common approach—known as *active strain*—mathematically represents the activation as a microstructural distortion, i.e. a change in the reference (relaxed) configuration [2]. Regardless the choice of the approach, the active term

*Corresponding author

Email addresses: giulia.pozzi@polito.it (G. Pozzi), davide.ambrosi@polito.it (D. Ambrosi), simone.pezzuto@unitn.it (S. Pezzuto)

must be constitutively stated, it depends on the specific problem at hand and can be a function of the deformation itself. The paradigmatic example in this respect is the Frank-Starling law of cardiac mechanics.

The estimation of passive and active parameters embedded in the constitutive laws of soft materials is a problem that has long been addressed by the scientific community [18, 25, 29, 13]. Above all, over the past few decades, such family of problems, classified as inverse problems from the mathematical perspective, are playing a crucial role in the field of personalized medicine where, for obvious reasons, the determination of material parameters cannot be addressed by the usual engineering technology. A striking example confirming the importance of a correct evaluation of the model parameters is cardiac modeling, where mathematical models have proven to be powerful diagnostic tools if combined with clinical data assimilation, for example integrating *in-vivo* MRI [33] or elastography data [21, 39].

In this scenario, the most important contribution leveraging a mathematical model in the attempt of estimating the material properties of the cardiac tissue can be traced back to the work of Guccione et al. [18], followed many years later by Augenstein et al. [4] and Wang et al. [38]. To this aim, different approaches were proposed ranging from standard techniques, as the minimization of the least-squares differences [26], to more heuristic methods, such as genetic algorithms [27, 25]. In the context of cardiac modeling, the estimation of active parameters is even more challenging and it becomes crucial in the presence of pathologies that affect the active contraction of the tissue. An example is the paramount importance of identifying possible infarcted regions, i.e., portions of the cardiac tissue where dead cardiomyocytes have lost their contractile ability and do not contribute to the power stroke of the heart. In this respect, a pioneering contribution is due to Sermesant et al. [35], who proposed a framework to estimate local contractility of the ventricular myocardium using a cardiac mathematical model fed by clinical MRI images and leveraging data assimilation procedures to estimate local contractility from given displacements. Later, Sun et al. [36] proposed a gradient-free optimization approach to facilitate the convergence towards the global minimum of the problem. In the same vein, several other approaches have been proposed, based on data assimilation principles, to reconstruct regional values of key biophysical parameters to feed mathematical models of the beating heart. However, all these attempts suffer from a major limitation: the estimation is restricted to a small number of contractility parameters defined on prescribed regions [14, 10, 17]. This feature is restrictive especially when an high precision in defining the scar boundaries is required. An improvement in this respect was made by Asner et al. [3] and by Kovacheva et al. [20].

Aim of this paper is to propose a novel variational method to evaluate the activity of a contractile material and, in particular, to identify inert regions that possibly have a sharp boundary, on the basis of some recorded displacements. The application we have in mind is the determination of infarcted cardiac areas. Figure 1 illustrates the main idea behind the proposed approach. In Section 2 we address the inverse problem to determine an inhomogeneous material active stress on the basis of some knowledge of the given displacement field. On the basis of an *a priori* knowledge of the constitutive law of the material and of the functional form of the active stress, we exploit a variational approach. After defining a suitable cost function, we look for the minimum of such functional and obtain the inverse problem, where the active stress is the unknown. The numerical solution of the inverse problem is discussed in Section 3. In Section 4, we discuss the numerical results and perform a sensitivity analysis on varying the formulation or some parameters of the problem. Finally, in Section 5 of the paper we discuss the obtained results comparing our approaches with the state-of-the-art methods.

2. Mathematical statement of the problem

2.1. The forward problem

Let us consider a continuous body defined in its reference configuration by the domain $\Omega \subset \mathbb{R}^d$, with $d = 2, 3$. We define the deformed configuration by a smooth map

$$\Omega \ni \mathbf{X} \mapsto \mathbf{x} = \mathbf{x}(\mathbf{X}),$$

where \mathbf{X} and \mathbf{x} are the material and spatial coordinates, respectively. We also define the displacement field $\mathbf{u}(\mathbf{X}) = \mathbf{x}(\mathbf{X}) - \mathbf{X}$ and the deformation gradient tensor $\mathbf{F} = \nabla \mathbf{x} = \mathbf{I} + \nabla \mathbf{u}$.

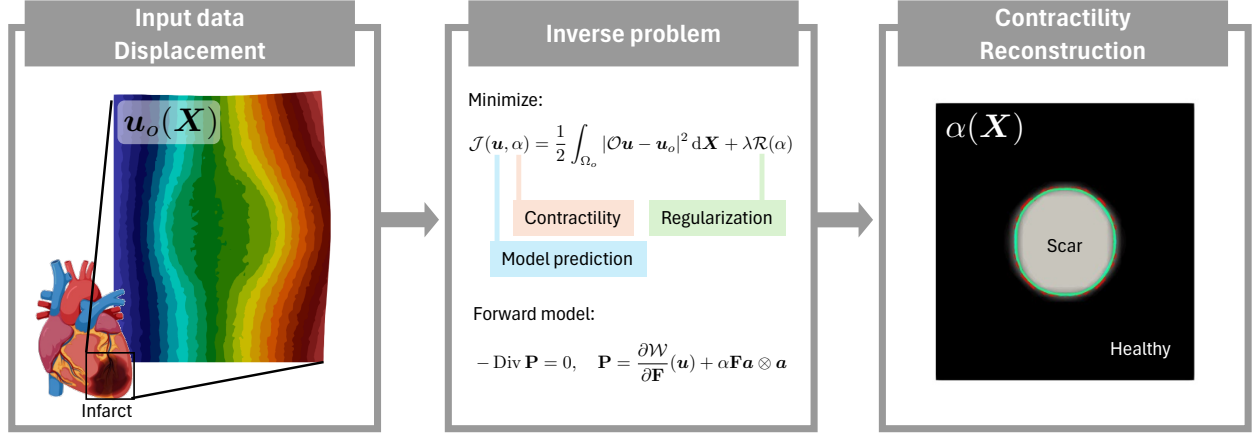


Figure 1: Sketch of the process outline. We first generate artificial *in-silico* data reproducing a 2D portion of the cardiac tissue presenting a scar—i.e. a region where the active contractility is impaired. For the given contractility field we solve the force balance equation and then perturb the solution (i.e. the displacement field) with a random noise to reproduce realistic data mimicking the output of imaging techniques. By an optimization technique, we solve the inverse problem to reconstruct the contractility function that minimizes the discrepancy between the simulated displacements and the artificial *in-silico* data.

We assume that the body exhibits a hyperelastic behaviour and we constitutively provide an isotropic strain energy density per unit of reference volume $W(\mathbf{F})$. As we are here mainly interested in methodological aspects, we keep the mechanical model at the minimum degree of complexity while retaining the essential features of inverse problems in finite elasticity. Accordingly, we assume the isotropic part to behave as a compressible neo-Hookean material [5]

$$W(\mathbf{F}) = \frac{\mu}{2} (\mathbf{F} : \mathbf{F} - 2 \log J - 2), \quad (1)$$

where $J = \det \mathbf{F}$ and $\mu \geq 0$ is the shear modulus. The strain energy in Eq. (1) corresponds, in a small strain regime, to an isotropic linear material with shear modulus μ and zero Poisson's ratio. Volume variation are penalized logarithmically at large strains. All the calculations that follow can be easily extended to more complex strain energies.

Since we assume the material to be active, the Piola stress tensor corresponding to Eq. (1) must be complemented by the active stress component \mathbf{P}_a as follows:

$$\mathbf{P}(\mathbf{F}, \alpha) = \frac{\partial W}{\partial \mathbf{F}} + \mathbf{P}_a = \mu(\mathbf{F} - \mathbf{F}^{-T}) + \alpha \mathbf{F} \mathbf{a} \otimes \mathbf{a}, \quad (2)$$

where $\mathbf{a} = \mathbf{a}(\mathbf{X})$ is the unit vector parallel to the fibers orientation in the reference configuration. Again, the specific form of the active stress we introduce in (2) is driven by a sake of simplicity only: more complex functional forms could be successfully adopted in the in the same methodological framework. The contractility $\alpha = \alpha(\mathbf{X})$ modulates the amplitude of the active stress.

Overall, we impose the force balance

$$-\nabla \cdot \mathbf{P} = \mathbf{0}, \quad (3)$$

that, for the sake of simplicity, we equip with homogeneous boundary conditions

$$\mathbf{P} \mathbf{n} \Big|_{\Gamma_N} = \mathbf{0}, \quad \mathbf{u} \Big|_{\Gamma_D} = \mathbf{0}, \quad (4)$$

where Γ_N and Γ_D , with $\Gamma_D \cup \Gamma_N = \partial\Omega$, denote the Neumann and the Dirichlet boundary, respectively.

In summary, the forward (or primal) problem consists in finding the displacement field $\mathbf{u}(\mathbf{X})$ given an active stress $\alpha(\mathbf{X})$. We remark that, under suitable regularity assumptions on the domain and parameters, the existence of a solution to the problem (3) is ensured by the polyconvexity of the strain energy (1) and the active stress term [34].

2.2. The cost functional

Let now assume the contractility $\alpha(\mathbf{X})$ to be unknown and the displacement of the body $\mathbf{u}(\mathbf{X})$ to be observable in a subregion $\Omega_o \subseteq \Omega$.

We thus aim at exploiting the knowledge of the observed displacements \mathbf{u}_o to reconstruct the contractility function. As so, we define the cost functional

$$\mathcal{J}(\mathbf{u}, \alpha) = \frac{1}{2} \int_{\Omega_o} |\mathcal{O}\mathbf{u} - \mathbf{u}_o|^2 d\mathbf{X} + \lambda \mathcal{R}(\alpha), \quad (5)$$

where \mathcal{O} is the observation (or restriction) operator from Ω to Ω_o and $\lambda \mathcal{R}(\alpha)$ is a regularization term and (\mathbf{u}, α) as such that Eq. (3) and Eq. (4) are satisfied. Together with physical requirement that $\alpha(\mathbf{X}) \geq 0$ for all $\mathbf{X} \in \Omega$, we formulate the inverse problem as the following constrained optimization problem:

$$\min_{\mathbf{u}, \alpha} \mathcal{J}(\mathbf{u}, \alpha), \quad \text{s.t.} \quad \begin{cases} -\nabla \cdot \mathbf{P} = 0, & \text{in } \Omega \\ \mathbf{P}\mathbf{n} = 0, & \text{on } \Gamma_N, \\ \mathbf{u} = 0, & \text{on } \Gamma_D, \\ \alpha \geq 0, & \text{in } \Omega. \end{cases} \quad (6)$$

The regularization term is necessary to cope with the ill-posedness of the inverse problem and recover a stable solution [22]. Typically, inverse problems lead to solutions that are unstable with respect to data perturbations, for instance due to noise in the measurements [15]. In this work we analyze three common choices for regularization, namely

$$\mathcal{R}_{L2}(\alpha) = \frac{1}{2} \int_{\Omega} \alpha^2 d\mathbf{X}, \quad (7a)$$

$$\mathcal{R}_{H1}(\alpha) = \frac{1}{2} \int_{\Omega} (\nabla \alpha)^2 d\mathbf{X}, \quad (7b)$$

$$\mathcal{R}_{TV}(\alpha) = \int_{\Omega} \sqrt{\varepsilon + \|\nabla \alpha\|^2} d\mathbf{X}, \quad (7c)$$

where $\varepsilon \ll 1$ in (7c) is a parameter, in our case set to 10^{-2} . The first two are Tikhonov-type regularization terms respectively of order zero for \mathcal{R}_{L2} and of order one for \mathcal{R}_{H1} [8]. Equation (7c) is an approximation of the total variation regularization [31, 11], well-known in the computer vision and imaging community. The choice of the regularization term is critical for imposing the desired regularity on $\alpha(\mathbf{X})$, as shown in Sec. 4.

2.3. Necessary optimality conditions

A minimizer of the constrained optimization problem (6) must satisfy a set of optimality conditions that we derive as follows. First, we introduce a Lagrange multiplier $\mathbf{p}(\mathbf{X}) = 0$ such that $\mathbf{p}(\mathbf{X}) = 0$ for $\mathbf{X} \in \Gamma_D$, we formally remove the equality constraints (the forward problem and the boundary conditions) through the following Lagrangian functional,

$$\mathcal{L}(\mathbf{u}, \alpha, \mathbf{p}) = \mathcal{J}(\mathbf{u}, \alpha) - \int_{\Omega} (-\nabla \cdot \mathbf{P}) \cdot \mathbf{p} d\mathbf{X} = \mathcal{J}(\mathbf{u}, \alpha) + \int_{\Omega} \mathbf{P} : \nabla \mathbf{p} d\mathbf{X}, \quad (8)$$

where we have used the Neumann boundary condition in the integration by parts. We recall that if $(\mathbf{u}^*, \alpha^*, \mathbf{p}^*)$ is a saddle point of the Lagrangian in Eq. (8), then (\mathbf{u}^*, α^*) is a minimizer of Eq. (6). A necessary condition for $(\mathbf{u}, \alpha, \mathbf{p})$ being a saddle point is that the first variation of the Lagrangian vanishes therein. Hence, we require that

$$\delta \mathcal{L}(\mathbf{u}^*, \alpha^*, \mathbf{p}^*) = \frac{\partial \mathcal{L}}{\partial \mathbf{u}}(\mathbf{u}^*, \alpha^*, \mathbf{p}^*) \delta \mathbf{u} + \frac{\partial \mathcal{L}}{\partial \alpha}(\mathbf{u}^*, \alpha^*, \mathbf{p}^*) \delta \alpha + \frac{\partial \mathcal{L}}{\partial \mathbf{p}}(\mathbf{u}^*, \alpha^*, \mathbf{p}^*) \delta \mathbf{p} = 0, \quad (9)$$

for all admissible variations $(\delta \mathbf{u}, \delta \alpha, \delta \mathbf{p})$.

To fix the ideas, in the following we consider \mathcal{R}_{TV} regularization. The Lagrangian reads as follows:

$$\mathcal{L}(\mathbf{u}, \alpha, \mathbf{p}) = \frac{1}{2} \int_{\Omega_o} |\mathcal{O}\mathbf{u} - \mathbf{u}_o|^2 d\mathbf{X} + \lambda \int_{\Omega} \sqrt{\varepsilon + \|\nabla\alpha\|^2} d\mathbf{X} + \int_{\Omega} \mathbf{P} : \nabla\mathbf{p} d\mathbf{X}. \quad (10)$$

The first variation follows from term-by-term differentiation of the above expression. We start with

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \mathbf{u}} \delta \mathbf{u} &= \int_{\Omega} \mathcal{O}^*(\mathcal{O}\mathbf{u} - \mathbf{u}_o) \cdot \delta \mathbf{u} d\mathbf{X} \\ &+ \int_{\Omega} \left(\mu (\nabla \delta \mathbf{u} - \mathbf{F}^{-T} (\nabla \delta \mathbf{u})^T \mathbf{F}^{-T}) + \alpha (\nabla \delta \mathbf{u}) \mathbf{a} \otimes \mathbf{a} \right) : \nabla \mathbf{p} d\mathbf{X} = 0, \end{aligned} \quad (11)$$

for all admissible $\delta \mathbf{u}$, where we used $\delta \mathbf{F} = \nabla \delta \mathbf{u}$, the definition of the Piola stress tensor \mathbf{P} given in Eq. (2), and the differentiation rule for a generic tensor \mathbf{A} : $\delta(\mathbf{A}^{-1}) = -\mathbf{A}^{-1} \delta \mathbf{A} \mathbf{A}^{-1}$. Here with the symbol \mathcal{O}^* we denote the adjoint observation operator with extends functions from Ω_o to Ω . Integrating by parts the second term yields the following *adjoint problem*:

$$\begin{cases} -\nabla \cdot \mathbb{C}(\mathbf{u}, \alpha) [\nabla \mathbf{p}] = \mathcal{O}^*(\mathbf{u}_o - \mathcal{O}\mathbf{u}), & \text{in } \Omega, \\ \mathbb{C}(\mathbf{u}, \alpha) [\nabla \mathbf{p}] \mathbf{n} = \mathbf{0}, & \text{on } \Gamma_N, \end{cases} \quad (12)$$

where with χ_{Ω_o} we denote the indicator function of Ω_o and we assumed that \mathbf{u}_o can be extended by continuity to the whole domain Ω . Moreover, we introduced the fourth-order Lagrangian tangent modulus

$$\mathbb{C}(\mathbf{u}, \alpha) [\mathbf{A}] = \mu (\mathbf{A} - \mathbf{F}^{-T} \mathbf{A}^T \mathbf{F}^{-T}) + \alpha \mathbf{A} \mathbf{a} \otimes \mathbf{a}. \quad (13)$$

We remark that for boundary observation, that is $\Omega_o \subseteq \Gamma_N$, the resulting adjoint problem has the same structure of (12) but with the term $\mathcal{O}^*(\mathbf{u}_o - \mathcal{O}\mathbf{u})$ on the second equation rather than the first one.

Similarly, the variation in \mathbf{p} ,

$$\frac{\partial \mathcal{L}}{\partial \mathbf{p}} \delta \mathbf{p} = \int_{\Omega} \mathbf{P} : \nabla \delta \mathbf{p} d\mathbf{X} = 0, \quad (14)$$

for all admissible $\delta \mathbf{p}$, gives the *primal problem*, corresponding to Eqs. (3) and (4).

The last term corresponds to the variation with respect to the control,

$$\frac{\partial \mathcal{L}}{\partial \alpha} \delta \alpha = \lambda \int_{\Omega} \frac{\nabla \alpha \cdot \nabla \delta \alpha}{\sqrt{\varepsilon + \|\nabla \alpha\|^2}} d\mathbf{X} + \int_{\Omega} (\delta \alpha \mathbf{F} \mathbf{a} \otimes \mathbf{a}) : \nabla \mathbf{p} d\mathbf{X} = 0, \quad (15)$$

for all admissible $\delta \alpha$. After integration by parts, we obtain the *optimality condition*,

$$\begin{cases} \lambda \nabla \cdot \left(\frac{\nabla \alpha}{\sqrt{\varepsilon + \|\nabla \alpha\|^2}} \right) = \nabla \mathbf{p} : (\mathbf{F} \mathbf{a} \otimes \mathbf{a}), & \text{in } \Omega, \\ \frac{\nabla \alpha \cdot \mathbf{n}}{\sqrt{\varepsilon + \|\nabla \alpha\|^2}} = 0, & \text{on } \partial \Omega. \end{cases} \quad (16)$$

The *optimal control problem* collects Eqs. (3), (4), (12), and (16) into a single non-linear system in the unknowns \mathbf{u} , α , and \mathbf{p} .

2.4. The reduced functional

From a numerical viewpoint, it is convenient to introduce the following *unconstrained* optimization problem:

$$\min_{\alpha} \mathcal{J}_{\text{red}}(\alpha) = \mathcal{J}(\mathbf{u}(\alpha), \alpha), \quad (17)$$

where $\mathbf{u}(\alpha)$ is the solution operator associated with the forward problem. The reformulation of the minimization problems this way allows to decouple the primal, adjoint and optimality problems from a numerical point of view, giving the possibility to adopt different numerical strategies for each of them. As a matter of fact, the functional (17) removes the equality constraints in Eq. (6), and makes the problem suitable for a large class of methods for unconstrained optimization, such as quasi-Newton methods. Formally, first-order optimization methods require, for a given $\bar{\alpha}$, the value of the cost functional $\mathcal{J}_{\text{red}}(\bar{\alpha})$ and its gradient. For the evaluation of $\mathcal{J}_{\text{red}}(\bar{\alpha})$, it is sufficient to first solve the forward problem to find $\bar{\mathbf{u}} = \mathbf{u}(\bar{\alpha})$, and then compute $\mathcal{J}(\bar{\mathbf{u}}, \bar{\alpha})$ from Eq. (5).

For the computation of the gradient, we observe that if \mathbf{u} and \mathbf{p} are respectively solution of the forward (3)-(4) and adjoint (12) problems, then

$$\delta \mathcal{J}_{\text{red}}(\alpha) = \frac{\partial \mathcal{J}_{\text{red}}}{\partial \alpha} \delta \alpha = \lambda \int_{\Omega} \frac{\nabla \alpha \cdot \nabla \delta \alpha}{\sqrt{\varepsilon + \|\nabla \alpha\|^2}} d\mathbf{X} + \int_{\Omega} (\delta \alpha \mathbf{F} \mathbf{a} \otimes \mathbf{a}) : \nabla \mathbf{p} d\mathbf{X}. \quad (18)$$

It follows that the Riesz's representative (the gradient) of $\partial_{\alpha} \mathcal{J}_{\text{red}}$, conveniently denoted by $\nabla \mathcal{J}_{\text{red}}(\bar{\alpha})$, is the unique function such that

$$\int_{\Omega} (\nabla \mathcal{J}_{\text{red}}) \delta \alpha d\mathbf{X} = \lambda \int_{\Omega} \frac{\nabla \bar{\alpha} \cdot \nabla \delta \alpha}{\sqrt{\varepsilon + \|\nabla \bar{\alpha}\|^2}} d\mathbf{X} + \int_{\Omega} (\delta \alpha \bar{\mathbf{F}} \mathbf{a} \otimes \mathbf{a}) : \nabla \bar{\mathbf{p}} d\mathbf{X} \quad (19)$$

for all directions $\delta \alpha$, where $\bar{\mathbf{F}} = \mathbf{F}(\bar{\mathbf{u}})$ and $\bar{\mathbf{p}}$ solves the adjoint problem. Equation (19) is important in the numerical implementation because $-\nabla \mathcal{J}_{\text{red}}$ provides a descent direction for the optimization algorithm.

Remark. The presented framework is not limited to the specific choices for the strain energy density function, boundary conditions, and activation model. For a general strain energy $\mathcal{W}(\mathbf{F})$, we replace the elasticity tensor in Eq. (13) with the following

$$\mathbb{C}(\mathbf{u}, \alpha)[\mathbf{A}] = \frac{\partial^2 \mathcal{W}}{\partial \mathbf{F} \partial \mathbf{F}}[\mathbf{A}] + \alpha \mathbf{A} \mathbf{a} \otimes \mathbf{a}.$$

For strictly incompressible materials, as it often happens on soft tissue biomechanics, the primal problem must be supplemented with the constraint $J = 1$ and the Piola stress tensor in Eq. (2) modifies as follows:

$$\mathbf{P}(\mathbf{F}, \alpha) = \frac{\partial \mathcal{W}}{\partial \mathbf{F}} - p J \mathbf{F}^{-T} + \alpha \mathbf{F} \mathbf{a} \otimes \mathbf{a}, \quad (20)$$

where p is the hydrostatic pressure. The corresponding adjoint problem follows as above.

3. Numerical methods

3.1. Numerical discretization

For the numerical discretization of the problem we employ the Finite Element Method (FEM). The state, adjoint, and control variables are approximated with piecewise linear elements on a triangular mesh \mathcal{T}_h of the domain Ω_h , where h is the average edge size. We denote by Q_h the space of linear functions and by V_h the space of vector-valued linear functions satisfying homogeneous Dirichlet conditions on Γ_D :

$$\begin{aligned} Q_h &= \{q_h : q_h|_K \in \mathbb{P}_1 \text{ for all } K \in \mathcal{T}_h\}, \\ V_h &= \{\mathbf{v}_h : \mathbf{v}_h|_K \in [\mathbb{P}_1]^d \text{ for all } K \in \mathcal{T}_h \text{ and } \mathbf{v}_h|_{\Gamma_D} = \mathbf{0}\}. \end{aligned}$$

The discretized state and adjoint variables are denoted by $\mathbf{u}_h \in V_h$ and $\mathbf{p}_h \in V_h$, respectively, whereas the control is $\alpha_h \in Q_h$. Therefore, the discretized problem is obtained from the variational problem Eq. (9), that is: Find $(\mathbf{u}_h, \alpha_h, \mathbf{p}_h) \in V_h \times Q_h \times V_h$ such that

$$\delta \mathcal{L}(\mathbf{u}_h, \alpha_h, \mathbf{p}_h) = \frac{\partial \mathcal{L}}{\partial \mathbf{u}_h} \delta \mathbf{u}_h + \frac{\partial \mathcal{L}}{\partial \alpha_h} \delta \alpha_h + \frac{\partial \mathcal{L}}{\partial \mathbf{p}_h} \delta \mathbf{p}_h = 0, \quad (21)$$

Algorithm 1 Calculation of $\mathcal{J}_{\text{red}}(\alpha_h)$

Require: $\alpha_h \geq 0$,

- 1: compute \mathbf{u}_h by solving the *state problem* (22) with α_h
 - 2: evaluate $\mathcal{J}(\mathbf{u}_h, \alpha_h)$
-

Algorithm 2 Calculation of $\nabla \mathcal{J}_{\text{red}}(\alpha_h)$

Require: $\alpha_h \geq 0$,

- 1: compute \mathbf{u}_h by solving the *state problem* (22) with α_h
 - 2: compute \mathbf{p}_h by solving the *adjoint problem* (23) with $(\mathbf{u}_h(\alpha_h), \alpha_h)$
 - 3: compute $\nabla \mathcal{J}_{\text{red}}(\alpha_h)$ from (26)
-

for all $(\delta \mathbf{u}_h, \delta \alpha_h, \delta \mathbf{p}_h) \in V_h \times Q_h \times V_h$. The resulting variational problem corresponds to Eq. (11), (15), and (14), precisely:

$$\text{(state problem)} \quad \int_{\Omega} \mathbf{P}_h : \nabla \delta \mathbf{p}_h = 0, \quad (22)$$

$$\text{(adjoint problem)} \quad \int_{\Omega} \mathbb{C}(\mathbf{u}_h, \alpha_h)[\nabla \mathbf{p}_h] : \nabla \delta \mathbf{u}_h + \int_{\Omega_o} \mathcal{O}^*(\mathcal{O} \mathbf{u}_h - \mathbf{u}_{o,h}) \cdot \delta \mathbf{u}_h \, d\mathbf{X} = 0, \quad (23)$$

$$\text{(optimality)} \quad \int_{\Omega} \lambda \frac{\nabla \alpha_h \cdot \nabla \delta \alpha_h}{\sqrt{\varepsilon + \|\nabla \alpha_h\|^2}} \, d\mathbf{X} + \int_{\Omega} (\delta \alpha_h \mathbf{F}_h \mathbf{a} \otimes \mathbf{a}) : \nabla \mathbf{p}_h \, d\mathbf{X} = 0, \quad (24)$$

where $\mathbf{F}_h = \mathbf{I} + \nabla \mathbf{u}_h$ and $\mathbf{P}_h = \mathbf{P}(\mathbf{F}_h, \alpha_h)$. Equations (22)-(24) form a sparse, non-linear system with $N_V^2 N_Q$ unknowns, where $N_V = \dim V_h$ and $N_Q = \dim Q_h$.

3.2. Solution of optimization problem

The numerical solution of Eqs. (22)-(24) is challenging. A standard Newton's method may not converge [28], unless the initial guess is already close enough to the true solution. Moreover, the resulting tangent system has a saddle-point block structure, which means that its solution requires dedicated preconditioners. This approach notoriously leads to high computational costs.

Here, we opt for a solution strategy based on a quasi-Newton optimization method. In other words, instead of directly solving the non-linear system monolithically, we minimize the reduced functional (17):

$$\min_{\alpha_h \in Q_h} \mathcal{J}_{\text{red}}(\alpha_h) = \min_{\alpha_h \in Q_h} \mathcal{J}(\mathbf{u}_h(\alpha_h), \alpha_h), \quad (25)$$

under the constraint that $\alpha_h \geq 0$ and where $\mathbf{u}_h(\alpha_h)$ is the solution operator of the discretized state problem in Eq. (22). Note that the optimization problem (25) is finite dimensional, since $\dim Q_h = N_Q < \infty$. For the sake of simplicity, we use the notation α_h also for the vector of coefficients in \mathbb{R}^{N_Q} .

A quasi-Newton method also requires the gradient of the objective function, denoted by $\nabla \mathcal{J}_{\text{red}}(\alpha_h)$. Thanks to the derivation in Sec. 2.4 and Eq. (24), we have the following problem for the gradient: Find $\nabla \mathcal{J}_{\text{red}}(\alpha_h) \in Q_h$ such that

$$\int_{\Omega} \nabla \mathcal{J}_{\text{red}} \delta \alpha_h \, d\mathbf{X} = \int_{\Omega} \lambda \frac{\nabla \alpha_h \cdot \nabla \delta \alpha_h}{\sqrt{\varepsilon + \|\nabla \alpha_h\|^2}} \, d\mathbf{X} + \int_{\Omega} (\delta \alpha_h \mathbf{F}_h \mathbf{a} \otimes \mathbf{a}) : \nabla \mathbf{p}_h \, d\mathbf{X}, \quad (26)$$

for all $\delta \alpha_h \in Q_h$. Note that when the optimality condition (24) is met, we are at a stationary point of the reduced functional, since $\nabla \mathcal{J}_{\text{red}}(\alpha_h) = 0$. In summary, given a tentative control α_h the computation of the gradient requires: the current state $\mathbf{u}_h = \mathbf{u}_h(\alpha_h)$, obtained by solving the state problem (22); the adjoint variable $\mathbf{p}_h(\mathbf{u}_h, \alpha_h)$, obtained by solving the adjoint problem (23) given \mathbf{u}_h and α_h ; the solution of the projection problem (26). See Algorithm 1 and Algorithm 2 for a summary.

For the optimization problem we use the Limited-memory BFGS method with Bound constraints (L-BFGS-B). This method iteratively updates α_h starting from an initial guess $\alpha_h^{(0)}$ as follows:

$$\alpha_h^{(k)} = \alpha_h^{(k-1)} + \beta^{(k-1)} q^{(k-1)}, \quad (27)$$

where $q^{(k-1)}$ is a *descent direction* and $\beta^{(k-1)}$ is the *step length* (or learning rate). The BFGS algorithm selects $q^{(k-1)}$ and $\beta^{(k-1)}$ such that

$$\mathcal{J}_{\text{red}}(\alpha_h^{(k)}) < \mathcal{J}_{\text{red}}(\alpha_h^{(k-1)}),$$

for all $k = 1, 2, \dots$ until a convergence criterium is met. The descent direction is computed as follows:

$$B^{(k)} q^{(k)} = -\nabla \mathcal{J}_{\text{red}}(\alpha_h^{(k)}), \quad (28)$$

where $B^{(k)}$ is a $N_Q \times N_Q$ symmetric, non-singular matrix. Note that when $B^{(k)}$ is positive-definite, for sufficiently small β we have that

$$\begin{aligned} \mathcal{J}_{\text{red}}(\alpha_h^{(k)}) &= \mathcal{J}_{\text{red}}(\alpha_h^{(k-1)} + \beta^{(k-1)} q^{(k-1)}) \\ &= \mathcal{J}_{\text{red}}(\alpha_h^{(k-1)} - \beta^{(k-1)} (B^{(k-1)})^{-1} \nabla \mathcal{J}_{\text{red}}) \\ &\approx \mathcal{J}_{\text{red}}(\alpha_h^{(k-1)}) - \beta^{(k-1)} (B^{(k-1)})^{-1} \nabla \mathcal{J}_{\text{red}} \cdot \nabla \mathcal{J}_{\text{red}} < \mathcal{J}_{\text{red}}(\alpha_h^{(k-1)}), \end{aligned}$$

thus we ensure a decrease of the objective functional. In a quasi-Newton method, the matrix $B^{(k)}$ is an approximation of the Hessian matrix of $\mathcal{J}_{\text{red}}(\alpha_h^{(k)})$, which ensures a super-linear convergence rate towards the local minimum. (When $B^{(k)}$ is the Hessian matrix at $\alpha_h^{(k)}$ we obtain the quadratically-convergent Newton's method, whereas for $B^{(k)} = I$ we have the gradient descent algorithm.) The BFGS method constructs such approximation by rank-one updates of an initial guess $B^{(0)}$ (usually the identity matrix), so that solving the linear system in Eq. (28) is simplified by the Sherman-Morrison formula. In the limited-memory variant of the BFGS method (L-BFGS), the approximation is truncated to a maximum number of rank-one updates, usually around 20. The step length $\beta^{(k-1)}$ is obtained by a backtracking line search method, that is, for a given direction $q^{(k-1)}$, the algorithm finds the largest β that ensures a sufficient reduction of the function

$$f(\beta) := \mathcal{J}_{\text{red}}(\alpha_h^{(k-1)} + \beta q^{(k-1)}).$$

Finally, the bound $\alpha_h \geq 0$ is handled by a projected gradient strategy, and the iterative process stops when the norm of the projected gradient is below a fixed tolerance. A detailed and complete description of the L-BFGS-B algorithm is given in [9].

Implementation aspects. The problem has been implemented using the open-source software Firedrake [19], which uses the PETSc library as linear algebra back-end [7, 6]. The variational formulation is computed by means of the automatic differentiation tool UFL [1]. We used the Firedrake `adjoint` module for the solution of the optimization problem, which internally uses the L-BFGS-B method as implemented in the `scipy` library [40]. The code is available at the address <http://github.com/pezzus/invscar>.

4. Numerical experiments

4.1. Parameters settings and in-silico data generation

The reference numerical test consists in the reconstruction of a circular scar region in a planar, unit-square domain. For simplicity, all quantities are dimensionless. The geometrical setup is depicted in Fig. 2. We simulate the presence of a scar by imposing the contractility function to be $\alpha = 0$ in a circular region of radius $r = 0.2$ situated in the middle of the domain and we set $\alpha = 1$ elsewhere. We set the coefficient $\mu = 1$ and the fiber orientation is assumed to be parallel to the horizontal direction. Boundary conditions apply

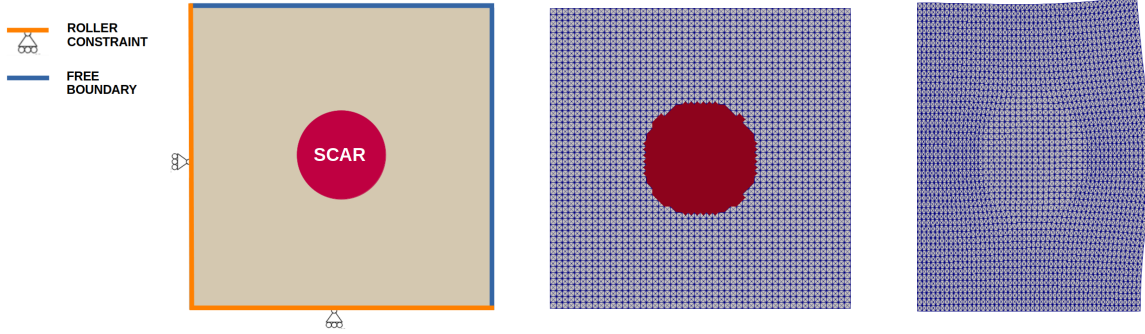


Figure 2: Problem setup. Sketch of the problem domain and its boundary conditions (left); mesh of the reference configuration with the red spot representing the scar, i.e. the region where $\alpha = 0$ (center); mesh of the deformed configuration (right).

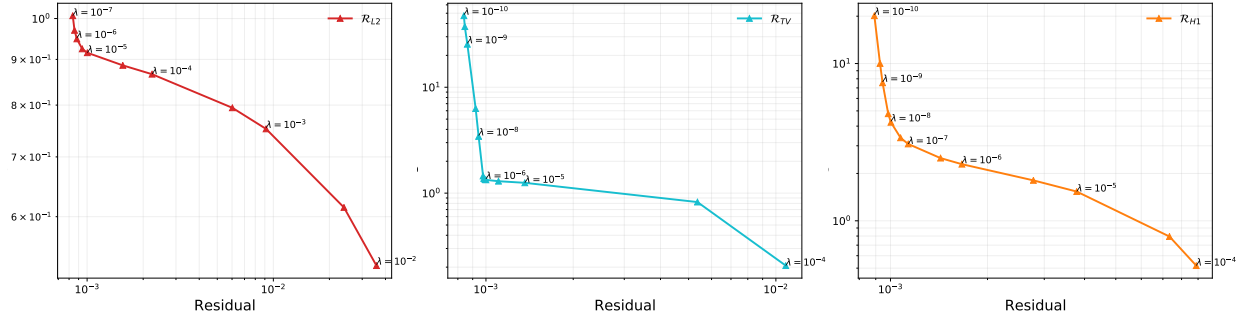


Figure 3: Pareto front for the optimal regularization weight. L-curves in logarithmic scale for three distinct regularizing terms in the cost functional: \mathcal{R}_{L2} (left), \mathcal{R}_{TV} (center) and \mathcal{R}_{H1} (right). Triangular markers denote the simulated data for a given value of the parameter λ .

as follows: the vertical displacement at the bottom edge and the lateral displacement at the left edge are null. The remaining portion of the domain border is a free boundary: no load applies. The finite element discretization of the mesh is uniform and counts 10^4 triangles.

To investigate the robustness of our approach, we generated *in-silico* the reference solution \mathbf{u}_{ref} by adding a component-wise white noise $\boldsymbol{\eta}$ with zero mean and variance 10^{-6} , that is $\mathbf{u}_o = \mathbf{u}_{\text{ref}} + \boldsymbol{\eta}$. In such a way, the corresponding *Signal to Noise Ratio* results

$$\text{SNR}_{\text{dB}} = 10 \log_{10} \frac{\|\mathbf{u}_{\text{ref}} + \boldsymbol{\eta}\|^2}{\|\boldsymbol{\eta}\|^2} \simeq 40 \text{ dB},$$

on average, that corresponds to a relative perturbation of the 1% on the displacement field.

4.2. The effect of the regularization term

In the first experiment, we solve the optimization problem (24) with different choices of the regularization type and the value of the regularization parameter λ . All other quantities are fixed.

To identify the optimal value for λ we computed the Pareto curve, the residual versus the magnitude of the regularization, for each approach (see plot in Fig. 3). The obtained curves are L-shaped where, according to the Pareto optimality principle, the optimal values correspond to the “elbow”: that is $\lambda_{L2}^{\text{opt}} \approx 5 \times 10^{-5}$, $\lambda_{TV}^{\text{opt}} \approx 10^{-6}$, and $\lambda_{H1}^{\text{opt}} \approx 5 \times 10^{-7}$.

From a qualitative view point, all the regularizing strategies capture a similar pattern, as shown in Fig. 4. Overall, all regularizations are able to recover the correct circular scar for some optimal value of λ . For small values of λ , we notice the presence of spurious oscillations around the scarred area, more pronounced in L2 than H1 and TV regularizations. The noisy reconstruction for small λ is a symptom of the ill-posedness of

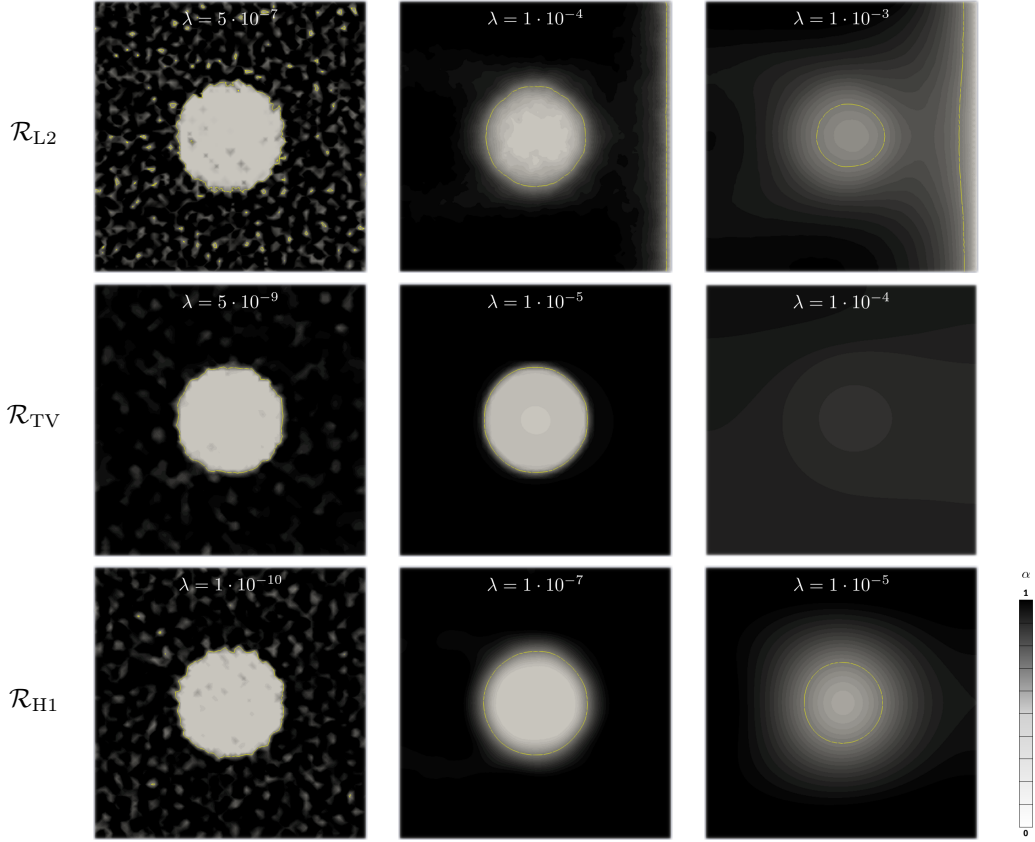


Figure 4: Contractility reconstruction. Scar profiles reconstructed with the L-BFGS method for three distinct regularizing terms in the cost functional: \mathcal{R}_{L2} (top row), \mathcal{R}_{TV} (central row) and \mathcal{R}_{H1} (bottom row). In each row, the relative weight λ of the regularization is increased from left to right. The thin yellow contours represent the isolines $\alpha = 0.4$. To better highlight the discontinuous profile of the contractility function, the value of α was rescaled to the range $[0, 1]$.

the inverse solution, because a small perturbation in the data \mathbf{u}_o corresponds to a large perturbation in the reconstruction.

For large values of λ , the contractility function α is smoother, impeding a precise delineation of the scar. This is particularly apparent with TV regularization, where for large λ the scar cannot be detected.

With the optimal λ , the TV reconstruction matches very closely the ground truth, whereas the H1 and L2 reconstructions have smoother boundaries. The L2 reconstruction is also more prone to spurious oscillations. We also observe that the L2 reconstruction has a boundary layer artifact, located on the vertical free boundary (the right one) and particularly pronounced for large λ . We further investigated the presence of this artifact in Appendix A, where we show that its position depends on the fiber direction and the boundary conditions.

The sharp approximation of the TV approach is expected, because the TV regularization promotes piecewise-constant solutions. Our choice of the ground-truth solution falls in this class. In real case scenarios it might happen that the scar is surrounded by a border zone characterized by remodelled tissue with a partial loss of contractility, thus the TV approach might incorrectly favor non-physiological reconstruction.

In Figure 5 we plot the convergence history obtained by different regularizing methods. In all cases, a good accuracy is achieved in less than 50 BFGS iterations. In fact, the convergence is very fast for L2 and H1 regularizations. For the TV approach the algorithm requires approximately 300 iterations to converge, although 20-30 iterations are already sufficient for an good reconstruction. The slow convergence rate of the

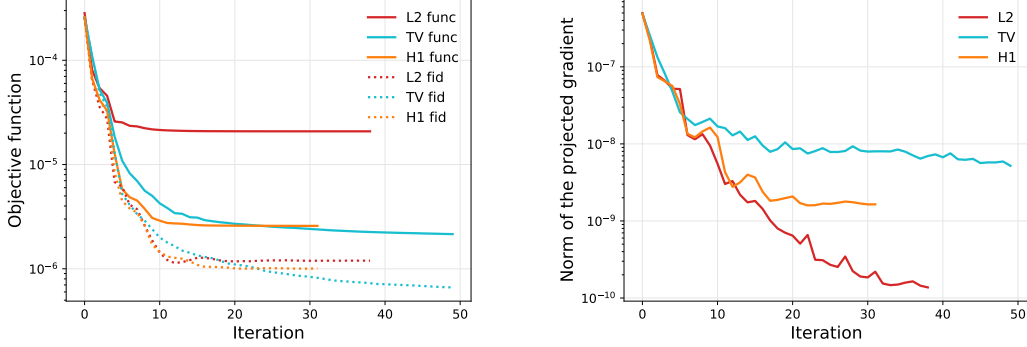


Figure 5: Convergence history for distinct regularizing terms. (Left) decay of the objective function (continuous lines), i.e. the cost functional, and of the fidelity term (dotted lines) over the iterations; (right) norm of the projected gradient (right) over the iterations. In both figures, the curves were obtained by setting $\lambda = \lambda_{opt}$ for each of the tested regularizing terms: \mathcal{R}_{L2} (red), \mathcal{R}_{TV} (blue) and \mathcal{R}_{H1} (orange).

TV approach is known in the literature, and it is due to the lack of regularity in the limit $\varepsilon \rightarrow 0$ in Eq. (7c).

In summary, the L2 approach is the most efficient in terms of computational cost and convergence rate, but its accuracy is limited by the presence of oscillations and artifacts at the boundary of the domain. The TV approach is very accurate yet costly. A good compromise is the H1 regularization, which appears to be the best compromise both from the perspective of prediction accuracy and convergence rate.

4.3. Sensitivity analysis

In the following we perform a sensitivity analysis of the method varying both on model parameters and assumptions on the measured data; an effective inverse method for delineating the scar should ideally depend only weakly on other and potentially unknown parameters. Precisely, we generate the ground truth with perturbed parameters, whereas the inverse solution assumes a forward problem with no perturbation. Effectively, the ground truth model and the state equation in the inverse problem are different. Finally, we report an analysis of robustness with respect to scar shape variations. Unless specified, all the reported results are obtained for the optimal value of the parameter λ .

Sensitivity to fiber direction. We first test the sensitivity of the inverse method to fibers orientation by L2 regularization by three distinct arrangements of the fibers while keeping the same boundary conditions. In Fig. 6 we show that the \mathcal{R}_{TV} and \mathcal{R}_{H1} regularization can accurately reconstruct the scar position, irrespective of the fiber direction. The \mathcal{R}_{L2} regularization suffers from a significant inaccuracy in the reconstruction of the contractility $\alpha(x, y)$ close to the stress-free boundary orthogonal to fibers. This issue is not present for the other regularization, because they can penalize sharp variations of $\nabla\alpha(x, y)$. We suspect that the anomalous behavior associated to \mathcal{R}_{L2} roots is related to the observability of the system (see Appendix A).

Sensitivity to material parameters. As a second test we include noise in the ground truth perturbing either the elastic modulus μ or the fibers orientation θ (where θ is s.t. $\mathbf{a} = [\cos \theta, \sin \theta]$). The ultimate goal of this analysis is to test the robustness of the proposed approach against observations generated by non-smooth and spatially-varying parameters. In fact, this will produce a spatially-correlated (colored noise) in the data.

We first construct a 95%-confidence interval for the reconstructed contractility by using a Monte Carlo approach and generating the observed data \mathbf{u}_o from N different random perturbations of the elastic modulus μ . Specifically, for each Monte Carlo step, we sample a different elastic modulus $\mu(\mathbf{X})$ from a Gaussian distribution centered in $\mu = 1$ and variance $\sigma^2 = 0.1$. The results of this test are reported in Fig. 7. Secondly, we again adopt a Monte Carlo approach for generating a 95%-confidence interval for the reconstructed contractility where, in this second case, the observed data \mathbf{u}_o are generated from N different random perturbations of local fiber orientation. This test aims at simulating the physiological disarray condition of

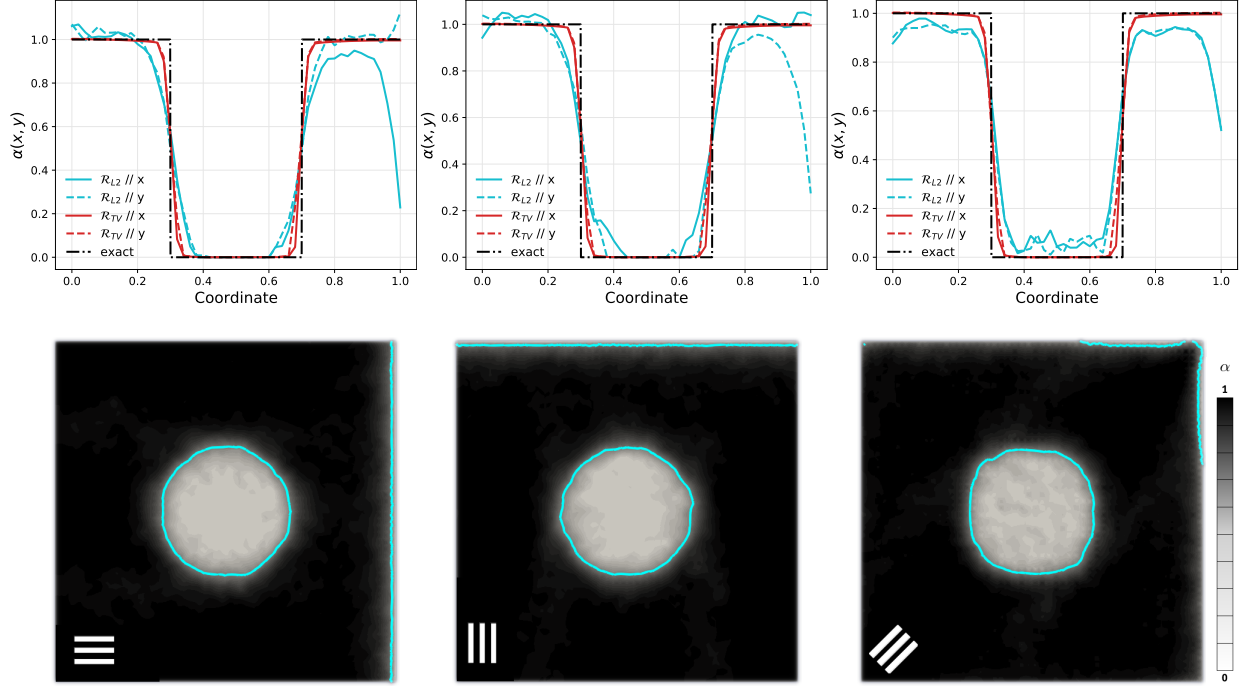


Figure 6: Sensitivity of the model to the spatial fibers orientation. Three distinct fibers orientation are tested: fibers parallel to x -axis (left) parallel to y -axis (center) and fibers whose direction forms an angle of 45° with the x -axis (right). (Top row) Comparison among the exact profile of $\alpha(x, y)$ and its numerical reconstructions, along the x - and y -direction, obtained with both with \mathcal{R}_{L2} and \mathcal{R}_{TV} ; (bottom row) scar profiles obtained from the numerical simulations (with \mathcal{R}_{L2}) where cyan contours depicting isolines $\alpha = 0.4$. Fibers orientation is depicted in the bottom left. The values of α were rescaled to the range $[0, 1]$ to better highlight the discontinuous profile of the contractility function. For each choice of the regularizing term, we set $\lambda = \lambda_{\text{opt}}$.

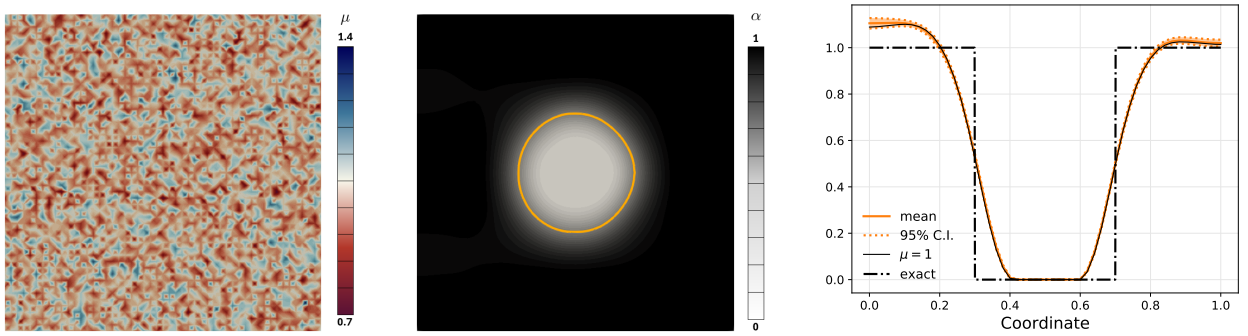


Figure 7: Robustness of the algorithm to perturbations of the parameter μ . (Left) A realization of the perturbed μ coefficient and (center) the corresponding scar profile reconstructed with the L-BFGS method (with \mathcal{R}_{H1} and $\lambda = \lambda_{H1}^{\text{opt}}$). Isolines $\alpha = 0.4$ are depicted by orange contours. The values of α were rescaled to the range $[0, 1]$ to better highlight the discontinuous profile of the contractility function. (Right) Estimated contractility for $\mu = 1$ (black line) superimposed on the 95%-confidence interval (C.I.) for the mean contractility along the x -direction obtained from the Monte Carlo simulation ($N = 30$) (orange area).

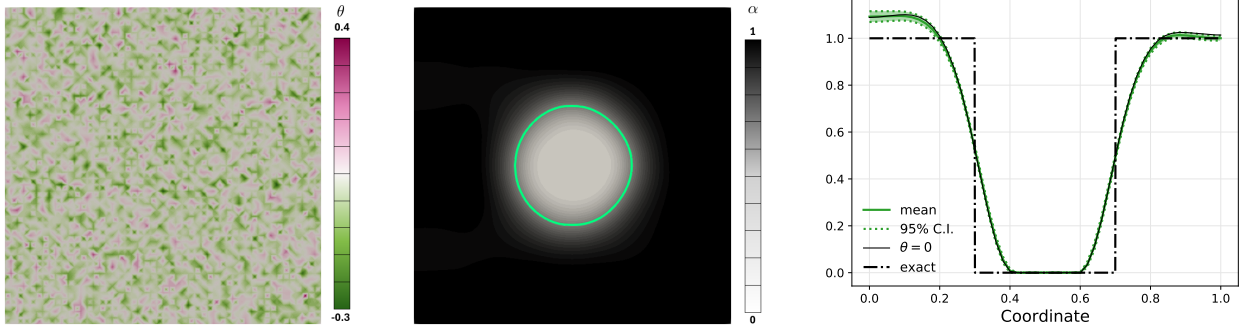


Figure 8: Robustness of the algorithm to perturbations of fibers direction θ . (Left) A realization of the perturbed θ and (center) the corresponding scar profile reconstructed with the L-BFGS method (with \mathcal{R}_{H1} and $\lambda = \lambda_{H1}^{opt}$). Isolines $\alpha = 0.4$ are depicted by green contours. The values of α were rescaled to the range $[0, 1]$ to better highlight the discontinuous profile of the contractility function. (Right) Estimated contractility for $\theta = 0$ (black line) superimposed on the 95%-confidence interval (C.I.) for the mean contractility along the x -direction obtained from the Monte Carlo simulation ($N = 30$) (green area).

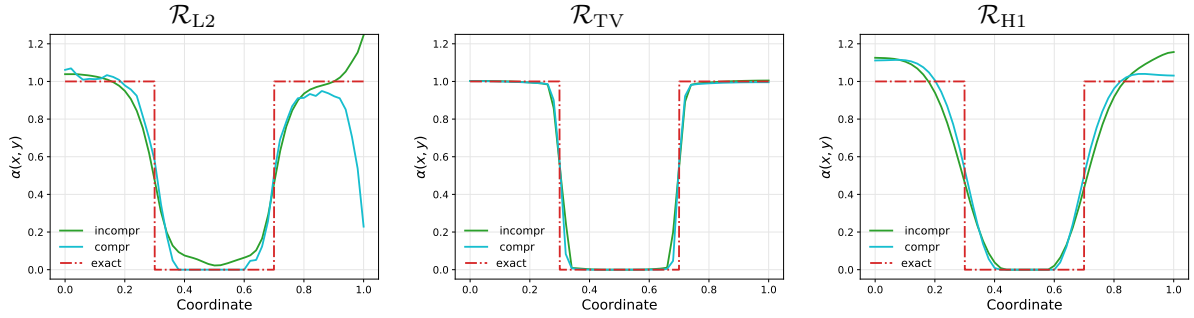


Figure 9: Effect of the incompressibility hypothesis on contractility reconstruction. (Top row) Comparison between the exact profile of $\alpha(x, y)$ (red) and the estimated contractility profiles for the fully incompressible material model (green) and the compressible material model (cyan) along the direction parallel to the fibres orientation. The value of α was rescaled to the range $[0, 1]$. For each chosen regularization we set $\lambda = \lambda_{opt}$.

the fibers in the heart [16]. As so, we generate different patterns of fibers by sampling the local value $\theta(\mathbf{X})$ from a Normal distribution centered in $\theta = 0$ and variance $\sigma^2 = 0.1$. The results of this test are reported in Fig. 8.

Overall, in both experiments the average reconstruction is close to the ground truth, although the contractility function is much smoother around the boundary of the scar. In terms of reconstruction uncertainty, we obtain narrow confidence intervals, thus supporting the robustness of the proposed approach in reconstructing the contractility even when the observed data are generated by non-smooth parameters.

Sensitivity to modeling assumptions. In this part, we test the effect of the incompressibility assumption in the forward model. We use the formulation in Eq. (20). The incompressibility constraint is enforced for both the ground truth model and the inverse problem.

The results are shown in Fig. 9. The incompressibility partially reduces the observability issue related to the choice of \mathcal{R}_{L2} in the contractility estimation; however, it overestimates $\alpha(x, y)$ on the free boundary orthogonal to the fiber direction. Conversely, the reconstruction obtained with the incompressible model fully match the ground truth, when choosing \mathcal{R}_{TV} as regularization. In this case, we also observe a complete agreement between the compressible and the incompressible material model, which can be interpreted as a symptom of over-regularization. Finally, for \mathcal{R}_{H1} , the compressible model performs better than the incompressible model with reference to the ground truth since, as for the \mathcal{R}_{L2} , the latter tends to overestimate the contractility at the free boundary.

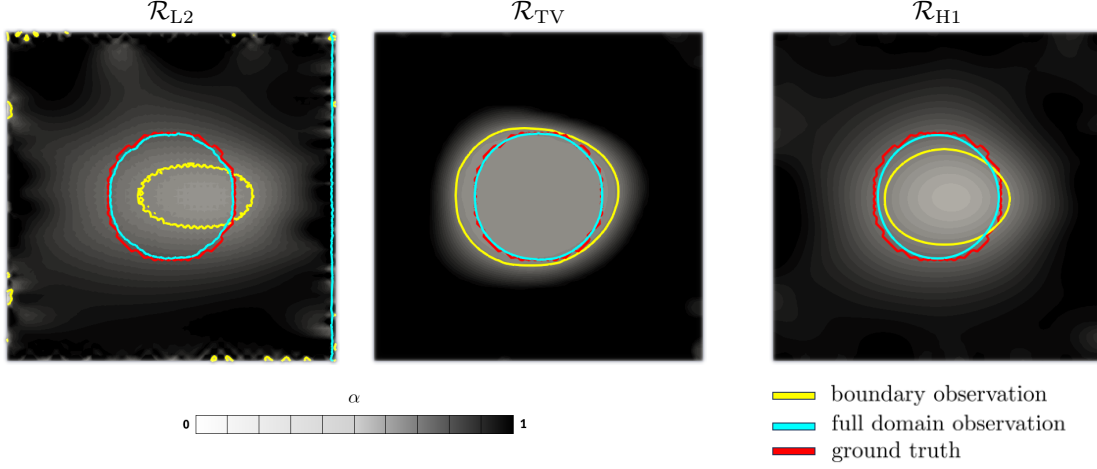


Figure 10: Effect of restricting observations to the boundary. Scar profiles obtained from the minimization of the cost functional (29) with the boundary observation operator for all the possible regularizing term: \mathcal{R}_{L2} (left), \mathcal{R}_{L2} (center) and \mathcal{R}_{L2} (right). Isolines $\alpha = 0.4$ for the boundary observation (yellow), for the full domain observation (blue) and for the ground truth (red) are superimposed to the contractility pattern. In each case we set $\lambda = \lambda_{\text{opt}}$. The value of α was rescaled to the range $[0, 1]$ for visual clarity.

Boundary observation. We now address a particular case, considering a restriction of the data fidelity term to the boundary of the domain, so that the cost functional reads as follows

$$\mathcal{J}(\mathbf{u}, \alpha) = \frac{1}{2} \int_{\partial\Omega} |\mathbf{u} - \mathbf{u}_o|^2 dS + \lambda \mathcal{R}(\alpha). \quad (29)$$

This choice also affects the adjoint problem (23).

Fig. 10 shows the estimated contractility function $\alpha(x, y)$ for each possible choice for the regularizing term. As expected, in all the three cases the scar profile (yellow contours) is captured with a significantly lower level of accuracy with respect to the case where the observation operator is extended to the whole domain (blue contours). More precisely, while the choice of \mathcal{R}_{L2} and \mathcal{R}_{H1} as regularization leads to an underestimation of the scar area, the choice of \mathcal{R}_{TV} results in an opposite behavior. Overall, the scar position is properly identified. However, the shape appears excessively elongated in the direction of the fibers, see Fig 10 (\mathcal{R}_{L2} and \mathcal{R}_{H1}).

Robustness to scar shape variations. The results obtained by varying the scar shape are shown in Fig. 11. Motivated by clinical observations, the ground truth scar geometry consist of two rectangles separated by a narrow strip of healthy tissue. We notice that the accuracy of the reconstructed contractility $\alpha(x, y)$ decreases as the distance between the two scars diminishes. Overall, the use of the observation operator restricted to the boundary of the domain dramatically affects the quality of the model prediction in all the proposed test cases. On the contrary, the performance of the algorithm is significantly improved, except in the most extreme case (Fig. 11, bottom row), by using the full domain observation combined with TV regularization. This choice allows for correct and accurate identification of the areas where contractility is impaired.

5. Discussion and conclusions

Determining the contractility of the cardiac tissue from displacement measurements is an important topic in cardiac modeling and patient-specific applications [3, 17, 20]. As other mechanical and electrical parameters, the local contractility cannot be directly measured *in vivo*, and must be deduced indirectly. Scarred and ischemic regions, where contractility is low or absent, can be delineated from low-voltage regions

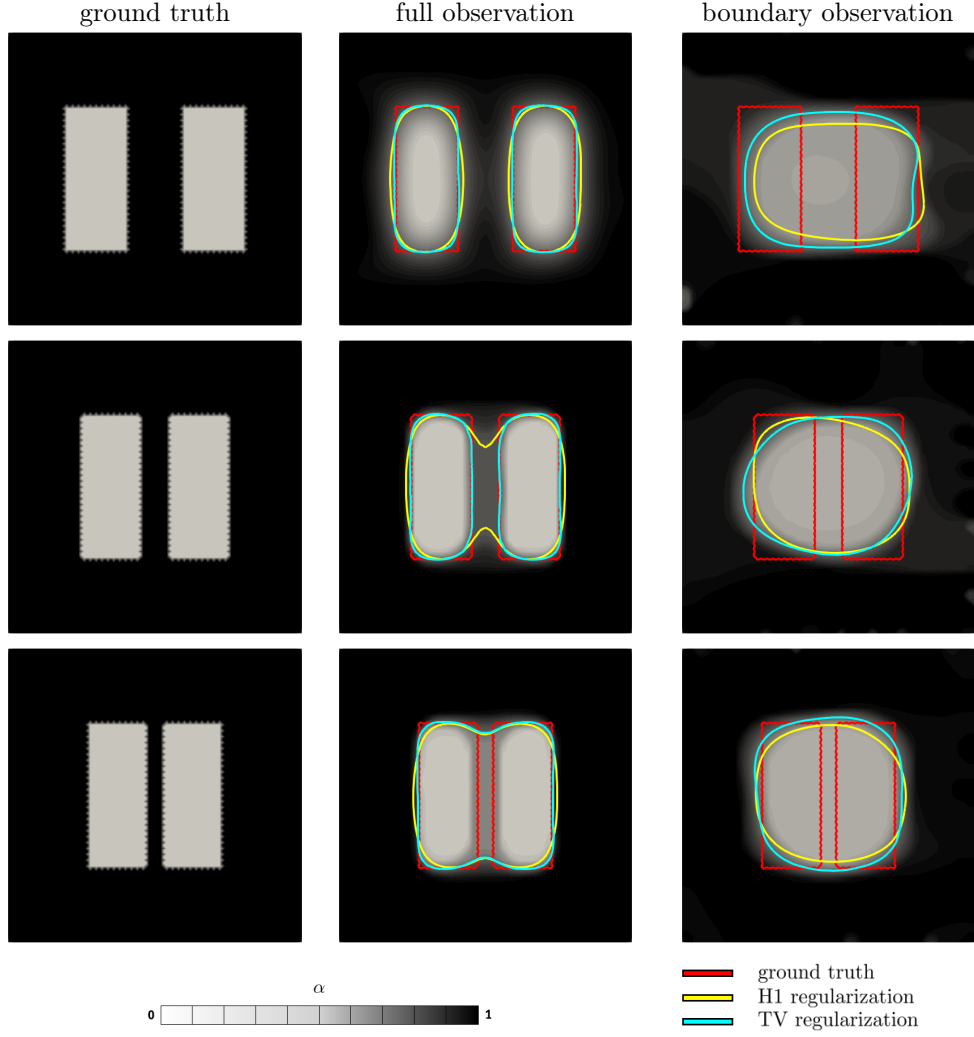


Figure 11: Sensitivity to the scar shape. The accuracy of the algorithm in reconstructing the contractility profile has been tested for three different scar conformations, obtained by progressively reducing the distance between two rectangular scars (Left: from top to bottom row). The test was carried out both by adopting the observation operator extended to the whole domain (center) and the one restricted to the boundary (right). Isolines $\alpha(x, y) = 0.5$ for the ground truth (red), the H1 regularization (yellow) and the TV regularization (blue). The value of α obtained with the TV regularization and rescaled to the range $[0, 1]$ is shown in the background (center, right). For each chosen regularization we set $\lambda = \lambda_{opt}$.

or from late enhancement MRI, for instance. Here, we have focused on kinematic information. Myocardial motion and strain can be acquired non-invasively by standard imaging techniques such as cardiac MRI or echo, or in an invasive manner with electroanatomical mapping systems [24]. Importantly, cardiac motion can be modelled by a balance of forces that includes contractility, offering the opportunity for the determination of contractility through an inverse problem solution.

After stating a suitable cost functional, designed to minimize the discrepancy between the observed displacement and the one predicted by the model, we have straightforwardly derived the adjoint equation, the state equation, and the optimality condition for the reconstruction of the contractility function. Given the ill-posedness of the inverse problem, we also introduced a regularization term. We have then tackled the resolution of the problem from the numerical perspective as an optimization problem, thus adopting the L-BFGS-B algorithm to minimize the cost functional subjected to the force balance equation and its boundary conditions. We have numerically tested our approach under quite severe conditions, where the region of impaired contractility is sharply separated from the active one and a 1% random noise has been added to the observed displacements. Within this framework, we have numerically tested three distinct regularizing terms on the reconstruction of the local contractility.

The numerical results show that the proposed approach is very effective and the H1 regularization is a good compromise both in terms of accuracy and efficiency: it overcomes both the limitation related to the slow convergence of the approximated TV regularization and the observability issues associated to the L2 regularization. The apparent superior ability of the TV regularization in capturing sharp boundaries (see Figure 9) should not be overemphasized: while we have purposely designed challenging numerical tests for the inversion method, in practical applications infarcted regions typically exhibit a smooth transition from healthy to dead cells. However, an exception that shows a significant improvement to the contractility prediction brought by the use of the TV regulation is reported in Figure 11.

Overall, the predicted local contractility is in good agreement with the ground truth, showing robustness of the results with respect to random noise both on the data and on the local value of the elastic modulus μ and the fibers direction θ . Moreover, when the TV and H1 regularizations are adopted, the proposed method appears to be able to predict with a good level of accuracy the local contractility even when the observed data are restricted to the boundary. This result is of particular interest with the perspective to tackle three dimensional cardiac data when the displacement is measured on the epicardium only.

Some methods proposed in the literature allow for the estimation of contractility as a region-wise constant function [10, 17]. The left ventricular wall is divided into 17 areas, known as AHA segments, and a constant contractility value is assigned to each of these segments by solving a discrete inverse problem, which exploits as datum the displacement acquired by means of imaging techniques of one or more points belonging to each AHA segment. Conversely, our approach enables an estimation of the local contractility as a continuous function across the entire domain, thus accurately identifying the scar profile without high computational costs.

More recently, Kovacheva et al. [20] addressed the problem of estimating the contractility and scarred tissue in 3D real geometries over an entire cardiac cycle. Their method is based on an inverse problem where the tangent map from the contractility to the displacement is estimated via finite differences. At numerical level, this matrix is dense and possibly large, thus the method may suffer of scalability issues. The adjoint approach proposed in this work overcomes this problem, because we can compute the action of the tangent map as the solution of a linear problem. Secondly, we are able to recover the contractility pattern in a large strain regime and for general hyperelastic materials. Interestingly, we did not observe a large sensitivity to fiber orientation for the detection of the scar, but this aspect should be further investigated in more a complex geometrical setup.

The method proposed in this paper suffers of course from some limitations. First, from a methodological point of view, the method might converge towards a local minimum of the cost functional, while the convergence to the global minimum is not guaranteed. Second, we have tested the approach only with synthetic data and simplified modelling assumption; in particular, we have adopted a simple strain energy that cannot be naively applied to cardiac modeling. In this respect, our methodology can be straightforwardly modified to incorporate more appropriate material laws [18]. In view of the incorporation of clinical data, we plan to further develop this work to 3D geometries. In the same vein, this methodology could be easily refor-

mulated to determine the orientation of the myocardial fibres on the basis of kinematic data in an healthy heart [23, 32].

In conclusion, our method provides a good framework for the identification of mechanical parameters of cardiac models from non-invasive clinical data, and it can significantly improve the definition of patient-specific models for precision cardiology. Finally, we remark that the validity of the proposed approach is not limited to cardiac electromechanics but the proposed method can be used for estimating the local contractility in a generic active material, whether natural or artificial.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgments

DA and GP were supported by the PRIN Research Project 2020F3NCPX. DA and GP acknowledges the support of INDAM-GNFM. GP was partially supported by INDAM-GNFM “*Fondo Progetto Giovani 2023*”. SP was supported by the SNSF project “CardioTwin” (no. 214817), the CSCS grant no. s1074, and the PRIN-PNRR project no. P2022N5ZNP. SP acknowledges the support of INDAM-GNCS.

References

- [1] Alnæs, M., Logg, A., Ølgaard, K., Rognes, M., Wells, G., 2014. Unified form language: A domain-specific language for weak formulations of partial differential equations. *ACM Transactions on Mathematical Software (TOMS)* 40, 1–37.
- [2] Ambrosi, D., Pezzuto, S., 2012. Active stress vs. active strain in mechanobiology: constitutive issues. *Journal of Elasticity* 107, 199–212.
- [3] Asner, L., Hadjicharalambous, M., Chabiniok, R., Peresutti, D., Sammut, E., Wong, J., Carr-White, G., Chowienicz, P., Lee, J., King, A., et al., 2016. Estimation of passive and active properties in the human heart using 3d tagged mri. *Biomechanics and modeling in mechanobiology* 15, 1121–1139.
- [4] Augenstein, K., Cowan, B., LeGrice, I., Nielsen, P., Young, A., 2005. Method and apparatus for soft tissue material parameter estimation using tissue tagged magnetic resonance imaging. *J. Biomech. Eng.* 127, 148–157.
- [5] Auricchio, F., Beirão da Veiga, L., Lovadina, C., Reali, A., Taylor, R.L., Wriggers, P., 2013. Approximation of incompressible large deformation elastic problems: some unresolved issues. *Computational Mechanics* 52, 1153–1167.
- [6] Balay, S., Abhyankar, S., Adams, M.F., Benson, S., Brown, J., Brune, P., Buschelman, K., Constantinescu, E.M., Dalcin, L., Dener, A., Eijkhout, V., Faibussowitsch, J., Gropp, W.D., Hapla, V., Isaac, T., Jolivet, P., Karpeev, D., Kaushik, D., Knepley, M.G., Kong, F., Kruger, S., May, D.A., McInnes, L.C., Mills, R.T., Mitchell, L., Munson, T., Roman, J.E., Rupp, K., Sanan, P., Sarich, J., Smith, B.F., Zampini, S., Zhang, H., Zhang, H., Zhang, J., 2023. PETSc Web page. <https://petsc.org/>. URL: <https://petsc.org/>.
- [7] Balay, S., Gropp, W.D., McInnes, L.C., Smith, B.F., 1997. Efficient management of parallelism in object oriented numerical software libraries, in: Arge, E., Bruaset, A.M., Langtangen, H.P. (Eds.), *Modern Software Tools in Scientific Computing*, Birkhäuser Press. pp. 163–202.
- [8] Budd, C., Nichols, N., 2011. Regularization techniques for ill-posed inverse problems in data assimilation. *Computers & fluids* 46, 168–173.
- [9] Byrd, R.H., Lu, P., Nocedal, J., Zhu, C., 1995. A limited memory algorithm for bound constrained optimization. *SIAM Journal on scientific computing* 16, 1190–1208.
- [10] Chabiniok, R., Moireau, P., Lesault, P., Rahmouni, A., Deux, J., Chapelle, D., 2012. Estimation of tissue contractility from cardiac cine-mri using a biomechanical heart model. *Biomechanics and modeling in mechanobiology* 11, 609–630.
- [11] Chan, T., Esedoglu, S., Park, F., Yip, A., et al., 2005. Recent developments in total variation image restoration. *Mathematical Models of Computer Vision* 17, 17–31.
- [12] Chung, H.J., Parsons, A., Zheng, L., 2021. Magnetically controlled soft robotics utilizing elastomers and gels in actuation: A review. *Advanced Intelligent Systems* 3, 2000186.
- [13] Ciccì, L., Fresca, S., Guo, M., Manzoni, A., Zunino, P., 2023. Uncertainty quantification for nonlinear solid mechanics using reduced order models with gaussian process regression. *Computers & Mathematics with Applications* 149, 1–23.
- [14] Delingette, H., Billet, F., Wong, K., Sermesant, M., Rhode, K., Ginks, M., Rinaldi, C., Razavi, R., Ayache, N., 2011. Personalization of cardiac motion and contractility from images using variational data assimilation. *IEEE transactions on biomedical engineering* 59, 20–24.
- [15] Engl, H.W., Hanke, M., Neubauer, A., 1996. Regularization of inverse problems. volume 375. Springer Science & Business Media.

- [16] Finocchiaro, G., Sheikh, N., Leone, O., Westaby, J., Mazzarotto, F., Pantazis, A., Ferrantini, C., Sacconi, L., Papadakis, M., Sharma, S., et al., 2021. Arrhythmogenic potential of myocardial disarray in hypertrophic cardiomyopathy: genetic basis, functional consequences and relation to sudden cardiac death. *EP Europace* 23, 985–995.
- [17] Finsberg, H., Balaban, G., Ross, S., Håland, T.F., Odland, H., Sundnes, J., Wall, S., 2018. Estimating cardiac contraction through high resolution data assimilation of a personalized mechanical model. *Journal of computational science* 24, 85–90.
- [18] Guccione, J.M., McCulloch, A.D., Waldman, L.K., 1991. Passive Material Properties of Intact Ventricular Myocardium Determined From a Cylindrical Model. *Journal of Biomechanical Engineering* 113, 42–55. URL: <https://doi.org/10.1115/1.2894084>, doi:10.1115/1.2894084.
- [19] Ham, D.A., Kelly, P.H.J., Mitchell, L., Cotter, C.J., Kirby, R.C., Sagiya, K., Bouziani, N., Vorderwuelbecke, S., Gregory, T.J., Betteridge, J., Shaper, D.R., Nixon-Hill, R.W., Ward, C.J., Farrell, P.E., Brubeck, P.D., Marsden, I., Gibson, T.H., Homolya, M., Sun, T., McRae, A.T.T., Luporini, F., Gregory, A., Lange, M., Funke, S.W., Rathgeber, F., Bercea, G.T., Markall, G.R., 2023. *Firedrake User Manual*. first edition ed. Imperial College London and University of Oxford and Baylor University and University of Washington. doi:10.25561/104839.
- [20] Kovacheva, E., Thämer, L., Fritz, T., Seemann, G., Ochs, M., Dössel, O., Loewe, A., 2021. Estimating cardiac active tension from wall motion—an inverse problem of cardiac biomechanics. *International Journal for Numerical Methods in Biomedical Engineering* 37, e3448.
- [21] Lee, W., Ingrassia, C., Costa, K., Holmes, J., Konofagou, E., et al., 2007. Theoretical quality assessment of myocardial elastography with in vivo validation. *IEEE transactions on ultrasonics, ferroelectrics, and frequency control* 54, 2233–2245.
- [22] Lions, J.L., 1971. Optimal control of systems governed by partial differential equations. volume 170. Springer.
- [23] Lubrecht, J.M., Grandits, T., Gharaviri, A., Schotten, U., Pock, T., Plank, G., Krause, R., Auricchio, A., Pezzuto, S., 2021. Automatic reconstruction of the left atrium activation from sparse intracardiac contact recordings by inverse estimate of fiber structure and anisotropic conduction in a patient-specific model. *EP Europace* 23, i63–i70. doi:10.1093/europace/euab392.
- [24] Maffessanti, F., Jadczyk, T., Kurzelowski, R., Regoli, F., Caputo, M.L., Conte, G., Golba, K.S., Biernat, J., Wilczek, J., Dąbrowska, M., Pezzuto, S., Moccetti, T., Krause, R., Wojakowski, W., Prinzen, F.W., Auricchio, A., 2020. The influence of scar on the spatio-temporal relationship between electrical and mechanical activation in heart failure patients. *EP Europace* 22, 777–786. doi:10.1093/europace/euz346.
- [25] Mojsejenko, D., McGarvey, J., Dorsey, S., Gorman, J., Burdick, J., Pilla, J., Gorman, R., Wenk, J., 2015. Estimating passive mechanical properties in a myocardial infarction using mri and finite element simulations. *Biomechanics and modeling in mechanobiology* 14, 633–647.
- [26] Moulton, M., Creswell, L., Actis, R., Myers, K., Vannier, M., Szabo, B., Pasque, M., 1995. An inverse approach to determining myocardial material properties. *Journal of biomechanics* 28, 935–948.
- [27] Nair, A., Taggart, D., Vetter, F., 2007. Optimizing cardiac material parameters with a genetic algorithm. *Journal of biomechanics* 40, 1646–1650.
- [28] Nocedal, J., Wright, S.J., 1999. Numerical optimization. Springer.
- [29] Regazzoni, F., Salvador, M., Dede, L., Quarteroni, A., 2022. A machine learning method for real-time numerical simulations of cardiac electromechanics. *Computer methods in applied mechanics and engineering* 393, 114825.
- [30] Riccobelli, D., Ambrosi, D., 2019. Activation of a muscle as a mapping of stress–strain curves. *Extreme Mechanics Letters* 28, 37–42.
- [31] Rudin, L.I., Osher, S., Fatemi, E., 1992. Nonlinear total variation based noise removal algorithms. *Physica D: nonlinear phenomena* 60, 259–268.
- [32] Ruiz-Herrera, C., Grandits, T., Plank, G., Perdikaris, P., Sahli Costabal, F., Pezzuto, S., 2022. Physics-informed neural networks to learn cardiac fiber orientation from multiple electroanatomical maps. *Engineering with Computers* doi:10.1007/s00366-022-01709-3, arXiv:2201.12362.
- [33] Sack, K., Davies, N., Guccione, J., Franz, T., 2016. Personalised computational cardiology: patient-specific modelling in cardiac mechanics and biomaterial injection therapies for myocardial infarction. *Heart failure reviews* 21, 815–826.
- [34] Schröder, J., Neff, P., 2003. Invariant formulation of hyperelastic transverse isotropy based on polyconvex free energy functions. *International journal of solids and structures* 40, 401–445.
- [35] Sermesant, M., Moireau, P., Camara, O., Sainte-Marie, J., Andriantsimavona, R., Cimirman, R., Hill, D., Chapelle, D., Razavi, R., 2006. Cardiac function estimation from mri using a heart model and data assimilation: advances and difficulties. *Medical image analysis* 10, 642–656.
- [36] Sun, K., Stander, N., Jhun, C., Zhang, Z., Suzuki, T., Wang, G.Y., Saeed, M., Wallace, A., Tseng, E., Baker, A., et al., 2009. A computationally efficient formal optimization of regional myocardial contractility in a sheep with left ventricular aneurysm. *J. Biomech. Eng* 131, 111001.
- [37] Tortora, G., Derrickson, B., 2014. *Anatomy & physiology*. Wiley India Pvt Limited.
- [38] Wang, V., Lam, H., Ennis, D., Cowan, B., Young, A., Nash, M., 2009. Modelling passive diastolic mechanics with quantitative mri of cardiac structure and function. *Medical image analysis* 13, 773–784.
- [39] Zervantonakis, I., Fung-Kee-Fung, S., Lee, W., Konofagou, E., 2007. A novel, view-independent method for strain mapping in myocardial elastography: eliminating angle and centroid dependence. *Physics in Medicine & Biology* 52, 4063.
- [40] Zhu, C., Byrd, R.H., Lu, P., Nocedal, J., 1997. Algorithm 778: L-bfgs-b: Fortran subroutines for large-scale bound-constrained optimization. *ACM Transactions on mathematical software (TOMS)* 23, 550–560.

Appendix A. Boundary conditions and system observability

As shown in Section 4.3, the use of the regularizing term \mathcal{R}_{L2} rises the issue on how the system observability may be affected by the choice of the boundary conditions. In this Appendix we provide arguments in support of the hypothesis that the poor reconstruction of contractility, that we obtain with \mathcal{R}_{L2} and a stress-free condition on the boundary perpendicular to the fibers direction, is imputable to a not fully observable system. To this end, we show how the displacement field can be modified by the presence of a scar located at the stress-free boundary, both for fibres arranges perpendicularly and parallel to that boundary, see Fig. A.12. We notice that when the scar is located in a region close to the boundary parallel to the fiber orientation (*C*), the displacement field is more affected, both in terms of magnitude and spatial localization, than the one obtained when the scar is located in a region perpendicular (*B*) to the fiber orientation. Accordingly, $\Delta^i = \|\mathbf{u} - \mathbf{u}_s^i\|/\|\mathbf{u}\|$ is significantly larger in the latter case (i.e. $\Delta^{\parallel}/\Delta^{\perp} \simeq 10$). Therefore, a scar positioned on the stress-free boundary orthogonal to the fibers does not introduce appreciable modification in the displacement field with respect to the solution obtained in case of healthy tissue (*A*). In other terms, Fig. A.12 (center) demonstrates that different contractility functions can result in nearly identical displacement fields. We notice that this pathological condition does not emerge when the scar is located at a stress-free border parallel to the fibers direction. In the former case, the choice of the regularizing term plays a fundamental role in restricting the field of admissible $\alpha(x, y)$ for a given observation \mathbf{u}_o , by penalizing non-physical features of the control variable. As so, the choice of \mathcal{R}_{L2} results inappropriate for the above described problem setting and generate inaccurate reconstructions of the contractility as shown in Fig. 6.

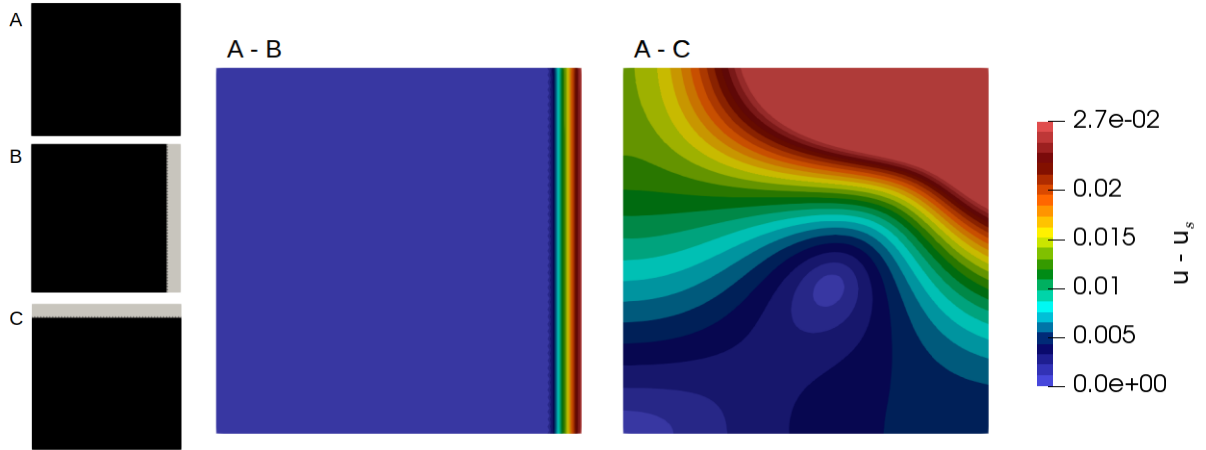


Figure A.12: Effect of a scar located at the free-boundary on the displacement field. (Left) Sketch of the three different scenarios reproduced in the test: (A) healthy tissue (black), (B) presence of a scar (gray) on the right boundary and (C) presence of a scar on the top boundary. (Center-Right) Difference in the displacement field \mathbf{u} of an healthy tissue and \mathbf{u}_s of a tissue presenting a scar located at the top stress-free boundary (center image) and right stress-free boundary (right image) represented in the reference configuration.